


GLOBAL Trac Pulse control

L1/L2/L3/neutral/ground 16 A/400 V + control 3 x 1 A/50 V FELV AC
DALI (FELV), DMX, LON, EIB, 1–10 V etc. compatible.


GLOBAL Trac Pulse control tracks

Available colours: –1 grey (AW202JR), –2 black (RAL 9005), –3 white (RAL 9010).

XTSC
6100–6400



XTSCF
6100–6400




Type	EAN code	Dimensions in mm/ track length	Surface treatment/colour/ material	PCS/ Package
XTSC6100-1	64100 14 531 42-3	1000	grey	4/240
XTSC6100-2	64100 14 531 43-0	1000	black	4/240
XTSC6100-3	64100 14 531 47-8	1000	white	4/240
XTSC6200-1	64100 14 531 48-5	2000	grey	4/240
XTSC6200-2	64100 14 531 49-2	2000	black	4/240
XTSC6200-3	64100 14 531 50-8	2000	white	4/240
XTSC6300-1	64100 14 531 51-5	3000	grey	4/240
XTSC6300-2	64100 14 531 52-2	3000	black	4/240
XTSC6300-3	64100 14 531 53-9	3000	white	4/240
XTSC6400-1	64100 14 531 54-6	4000	grey	4/240
XTSC6400-2	64100 14 531 55-3	4000	black	4/240
XTSC6400-3	64100 14 531 56-0	4000	white	4/240
XTSCF6100-1	64100 14 531 57-7	1000	grey	6/180
XTSCF6100-2	64100 14 531 58-4	1000	black	6/180
XTSCF6100-3	64100 14 531 59-1	1000	white	6/180
XTSCF6200-1	64100 14 531 60-7	2000	grey	6/180
XTSCF6200-2	64100 14 531 61-4	2000	black	6/180
XTSCF6200-3	64100 14 531 62-1	2000	white	6/180
XTSCF6300-1	64100 14 531 63-8	3000	grey	6/180
XTSCF6300-2	64100 14 531 64-5	3000	black	6/180
XTSCF6300-3	64100 14 531 68-3	3000	white	6/180
XTSCF6400-1	64100 14 531 69-0	4000	grey	6/180
XTSCF6400-2	64100 14 531 70-6	4000	black	6/180
XTSCF6400-3	64100 14 531 71-3	4000	white	6/180


GLOBAL Trac Pulse control accessories

Power supply in all connectors except XTS(C)621 and XTS(C)623. All materials used are halogen free and V0-self-extinguishing.
Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).



End feed
XTSC 611




XTSC 612




Type	EAN code	Polarity ridge	Surface treatment/colour/ material	PCS/ Package
XTSC611-1	64100 14 532 37-6		grey	5/50
XTSC611-2	64100 14 532 38-3		black	5/50
XTSC611-3	64100 14 532 39-0		white	5/50
XTSC612-1	64100 14 532 40-6		grey	5/50
XTSC612-2	64100 14 532 41-3		black	5/50
XTSC612-3	64100 14 532 42-0		white	5/50

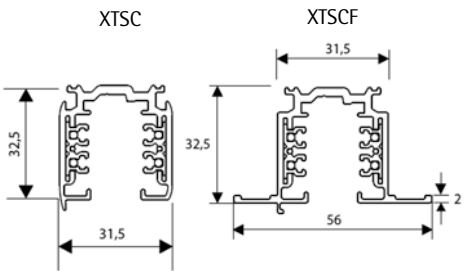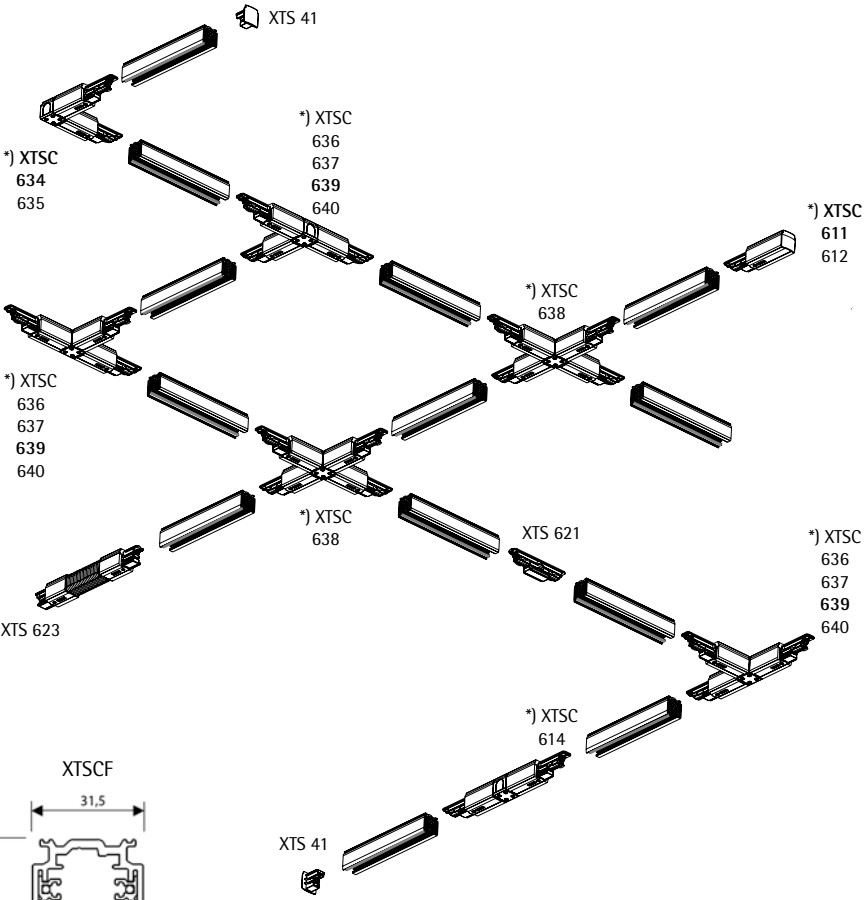

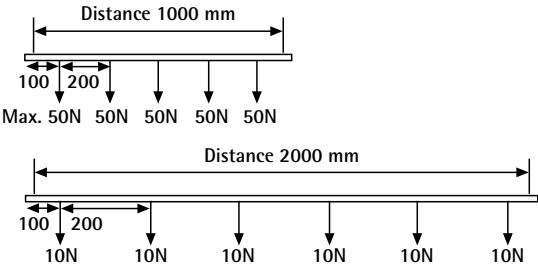The recommended fastening distance is 1000 mm.
NOTE: A load not heavier than 10 kg may hang on a power
takeoff adapter, the pull strength being 100 N (1kp = 9.81N)
and the maximum torque 2.5 Nm. (GA 69 5 kg/50 N).
















L/mm	a/mm	b/mm	c/mm	d/mm
1000	250	1000		
2000	250			
3000	250		1000	1000
4000	250		1500	1000

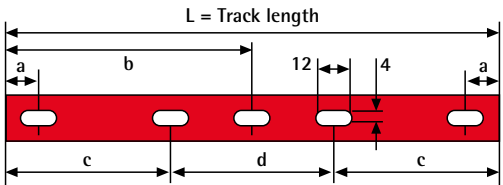



GLOBAL Trac Pulse control accessories

Power supply in all connectors except XTS(C)621 and XTS(C)623.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).
All materials used are halogen free and VO-self-extinguishing.

Middle feed XTSC 614	Type	EAN code	Polarity ridge	Surface treatment/colour/ material	PCS/ Package
	XTSC614-1	64100 14 532 44-4		grey	5/25
	XTSC614-2	64100 14 532 45-1		black	5/25
	XTSC614-3	64100 14 532 46-8		white	5/25
Straight connector XTSC 621	XTS(C)621-1	64100 14 532 10-9		grey	10/100
	XTS(C)621-2	64100 14 532 11-6		black	10/100
	XTS(C)621-3	64100 14 532 12-3		white	10/100
Flexible corner connector XTSC 623	XTS(C)623-1	64100 14 532 13-0		grey	5/25
	XTS(C)623-2	64100 14 532 14-7		black	5/25
	XTS(C)623-3	64100 14 532 15-4		white	5/25
L-feed XTSC 634, 635	XTSC634-1	64100 14 532 47-5		grey	5/25
	XTSC634-2	64100 14 532 48-2		black	5/25
	XTSC634-3	64100 14 532 49-9		white	5/25
	XTSC635-1	64100 14 532 50-5		grey	5/25
	XTSC635-2	64100 14 532 51-2		black	5/25
	XTSC635-3	64100 14 532 55-0		white	5/25
T-feed XTSC 636, 637, 639, 640	XTSC636-1	64100 14 532 56-7		grey	1/20
	XTSC636-2	64100 14 532 57-4		black	1/20
	XTSC636-3	64100 14 532 58-1		white	1/20
	XTSC637-1	64100 14 532 59-8		grey	1/20
	XTSC637-2	64100 14 532 60-4		black	1/20
	XTSC637-3	64100 14 532 63-5		white	1/20
	XTSC639-1	64100 14 532 69-7		grey	1/20
	XTSC639-2	64100 14 532 70-3		black	1/20
	XTSC639-3	64100 14 532 71-0		white	1/20
	XTSC640-1	64100 14 532 72-7		grey	1/20
	XTSC640-2	64100 14 532 73-4		black	1/20
	XTSC640-3	64100 14 532 74-1		white	1/20
X-feed XTSC 638	XTSC638-1	64100 14 532 64-2		grey	1/10
	XTSC638-2	64100 14 532 65-9		black	1/10
	XTSC638-3	64100 14 532 66-6		white	1/10
End cap XTS 41	XTS41-1	64100 14 507 32-9		grey	10/100
	XTS41-2	64100 14 506 41-4		black	10/100
	XTS41-3	64100 14 507 41-1		white	10/100

GLOBAL Trac Pulse control accessories

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

Hook base XTAK 142, 144, 146	Type	EAN code		Surface treatment/colour/ material	PCS/ Package
	XTAK142-1	64100 14 507 43-5	For 2 mm wire/hook	Grey	50/250
	XTAK142-2	64100 14 506 42-1	For 2 mm wire/hook	Black	50/250
	XTAK142-3	64100 14 507 42-8	For 2 mm wire/hook	White	50/250
	XTAK144-1	64100 14 507 45-9	For M4 nut/rod	Grey	50/250
	XTAK144-2	64100 14 506 44-5	For M4 nut/rod	Black	50/250
	XTAK144-3	64100 14 507 44-2	For M4 nut/rod	White	50/250
Hook XTAK 11	XTAK146-1	64100 14 507 47-3	For M6 nut/rod	Grey	50/250
	XTAK146-2	64100 14 506 46-9	For M6 nut/rod	Black	50/250
	XTAK146-3	64100 14 507 46-6	For M6 nut/rod	White	50/250
Tool XTSV 12	XTAK11-1	64100 14 500 79-5	Hook 2 mm	Steel	100/5000
	XTSV12	64100 14 500 99-3	Bending tool for power wires	Blue	1/100
Cover plates XTSF 610	XTSF610-1	64100 14 532 77-2	Cover plate for XTSC611-614	grey	1/100
	XTSF610-2	64100 14 532 80-2	Cover plate for XTSC611-614	black	1/100
	XTSF610-3	64100 14 532 81-9	Cover plate for XTSC611-614	white	1/100
XTSF 630	XTSF630-1	64100 14 532 82-6	Cover plate for XTSC634-640	grey	1/100
	XTSF630-2	64100 14 532 83-3	Cover plate for XTSC634-640	black	1/100
	XTSF630-3	64100 14 532 84-0	Cover plate for XTSC634-640	white	1/100
XTSF 40	XTSF40-1	64100 14 506 43-6	Outlet/cover plate for feeds	Grey	1/100
	XTSF40-2	64100 14 506 63-6	Outlet/cover plate for feeds	Black	1/100
	XTSF40-3	64100 14 507 63-3	Outlet/cover plate for feeds	White	1/100
Cover strip XTSP 11	XTSP11-2	64100 14 530 99-0	Cover strip, 3000 mm	Black	10/100
	XTSP11-3	64100 14 530 98-3	Cover strip, 3000 mm	White	10/100

Use of L- and T-accessories
Red line indicates ground polarity ridge

